


# **AMLS-5050T**POWER SPRAYER



DISCLAIMER: DUE TO CONSTANT UPGRADATION, FEATURES AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE



BEFORE OPERATING THIS MACHINE, PLEASE READ THESE INSTRUCTIONS CAREFULLY

#### INTRODUCTION

Please peruse the contents in the instruction manual prior to use this machine, correctly carried out installation and debugging, as well as used it strictly cording to the working specification in the instruction manual. The user should be familiar with the safety notices, machine performance, and maintenance, etc. The instruction manual will be used in the later use, repair, accessories replacement, and accessories procurement, so please keep it carefully

#### **OPERATING INSTRUCTION**

- Securely mount the machine on the frame, ensured the two belt pulleys be parallel and on the same plane, and the tension of belt be moderate
- Add 30~40# machine oil up to 1/2 of oil gauge plug
- 3 The connectors of each rubber pipe and high pressure pipe must be locked tightly
- 4 Before start the motor, open the jet gun and ball cock, and loosen the adjusting screw
- Start the motor, keeping it at appropriate velocity; Waiting there is water ejecting from the jet gun, close the jet gun or ball cock, and adjust the adjusting screw to let the pressure reach the working pressure
- Turn on the ball cock and jet gun, beginning spraying. During the process may properly adjust the adjusting screw to maintain the required pressure, and lock tightly the fly nut at any moment
- After spraying, operate the sprayer with clean water for 2~3 minutes to clean the residual interior chemicals
- Firstly dismantle the suction hose, waiting there is no water flowing out from the jet gun or the overflow hose, stop the machine and dismantle over flow hose, high pressure pipe, and loosen the adjusting screw

## **TECHNICAL PARAMETERS**

Model	AMLS-5050T	
Name	Power Sprayer	(%)
RPM	500 ~ 900	
FLOW (L/Min)	27.5 ~ 49.5	
POWER HP/KW	8/5.5	
WORKING PRESSURE (Kgt/cm³)	23 ~ 25	
PISTON DIA (mm) / STROKE (mm)	25/50	

#### **TROUBLE ANALYSIS**

Trouble	Cause	Solution
Can't supply	Strainer Assy blocked	Clean Strainer Assy
	Suction Hose leaked	Lock tightly Wing Net or replace Packing
water Unstable	Redundant air inside pump	Exhaust redundant air inside pump
pressure	Valve damaged or blocked	Eliminate impurities or replace Valve Seal
Cylinder leaked	Grand too loose	Lock tightly Grand (After machine stopped)
	V-packing damaged	Replace V-packing
Pressure shortage	Improper pressure adjustment	Adjust adjusting screw to proper pressure
	Belt too loose	Adjust belt to moderate tension
	High pressure pipe leaked	Check, repair, or replace high pressure pipe
	Valve or valve seat damaged	Replace valve or valve seat
Leaked oil	Oil seal damaged, unlocked tightly	Lock tightly or replace relevant oil seal
Temperature too high	No lubricating oil or too dirty	Add grease on time, replace clean lubricating oil
	Pressure or velocity too high	Adjust to proper pressure or velocity

We reserve the right for revision without further notice!

AGRIMATE

AGRIMATE

AGRIMATE

AURIFIATE

#### **MAINTENANCE AND SERVICE**

- 1. Replace the oil after begin use for 40 hours, and thence replace it one time using each 70 hours;
- 2. Add grease one time each two hours during using;
- 3. After each work finished, operate it with clean water for 2 ~ 3 minutes to eliminate the residual chemical and keep each parts clean;
- 4. For long term placement, wipe clean the spraying machine and place it at the cool and dry place.

#### **SAFETY NOTICES**

- 1. Using this machine with extra high pressure is prohibited (Should ≤35kgf/cm2)
- 2. The belt pulley should have safety protective device;
- 3. Should wear such protective tools as breathing mask in spraying, and spraying toward personnel and working at the downwind position are prohibited;
- 4. Running without water or lubricating oil is prohibited;
- 5. Using such special working solutions as strong acid, strong alkali, etc. is prohibited, and should operate strictly according to the safety prompts of manufacturing plant in spraying.

## **ACCESSORIES**










Content			
Suction Hose 5mtr	Oil Seal	Special Spanner	V Pully
Overflow Hose 5mtr	'O' Ring	Suction Strainer	
Belt	Pump Fitting Fastners	User Manual	

## **DIAGRAM OF AMLS- 5050T POWER SPRAYER**

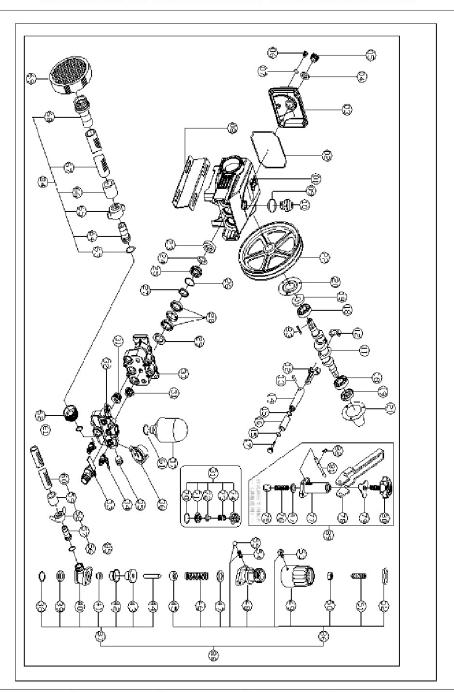

## **SPARE PART LIST OF AMLS 5050T POWER SPRAYER**

ASSITIATE

ASBIRATE

SL NO	PART NO	DESCRIPTION
1	AMLS-5050T-01	Crank Case
2	AMLS-5050T-02	Ring CrankCase
3	AMLS-5050T-03	Cover CrankCase
4	AMLS-5050T-04	O-Ring
5	AMLS-5050T-05	Oil Gauge Plug
6	AMLS-5050T-06	Oil Plug
7	AMLS-5050T-07	O-Ring
8	AMLS-5050T-08	Bed CrankCase
9	AMLS-5050T-09	O-Ring
10	AMLS-5050T-10	Oil Plug
11	AMLS-5050T-11	Crank Shaft
12	AMLS-5050T-12	Connecting Rod
13	AMLS-5050T-13	Plunger Pin
14	AMLS-5050T-14	Plunger
15	AMLS-5050T-15	O-Ring
16	AMLS-5050T-16	Ceramic Plunger
17	AMLS-5050T-17	Screw
18	AMLS-5050T-18	Bearing
19	AMLS-5050T-19	Oil Seal, Crank Shaft
20	AMLS-5050T-20	Cover,Oil Seal
21	AMLS-5050T-21	Cover,Shaft
22	AMLS-5050T-22	Pully
23	AMLS-5050T-23	Oil Seal,Plunger
24	AMLS-5050T-24	Seal,Stopping Water
25	AMLS-5050T-25	Grand
26	AMLS-5050T-26	O-Ring
27	AMLS-5050T-27	Grease Ring
28	AMLS-5050T-28	V-Packing
29	AMLS-5050T-29	V-Packing Seat
30	AMLS-5050T-30	Cylinder

AGRIFATE

AGRITATE

## **SPARE PART LIST OF AMLS 5050T POWER SPRAYER**

AGRIMATE

ASBIRATE

SL NO.	PART NO	PARTS NAME
31	AMLS-5050T-31	Valve Assy
32	AMLS-5050T-32	Discharge Metal
33	AMLS-5050T-33	Ball Cock
34	AMLS-5050T-34	Ball Cock
35	AMLS-5050T-35	Screw
36	AMLS-5050T-36	Pressure Gauge
37	AMLS-5050T-37	Air Chamber
38	AMLS-5050T-38	O-Ring 26x2
39	AMLS-5050T-39	Valve Seat
40	AMLS-5050T-40	Body Overflow
41	AMLS-5050T-41	Valve
42	AMLS-5050T-42	Water Seal Cup
43	AMLS-5050T-43	Box Water Seal
44	AMLS-5050T-44	Valve Bar
45	AMLS-5050T-45	Under Metal
46	AMLS-5050T-46	Spring
47	AMLS-5050T-47	Upper Metal
48	AMLS-5050T-48	Spring Box
49	AMLS-5050T-49	Adjusting Screw
50	AMLS-5050T-50	Nut
51	AMLS-5050T-51	Screw
52	AMLS-5050T-52	Handle Cover
53	AMLS-5050T-53	Screw
54	AMLS-5050T-54	Spring
55	AMLS-5050T-55	ball bearing
56	AMLS-5050T-56	O-Ring
57	AMLS-5050T-57	Core Coupling
58	AMLS-5050T-58	Wing Net
59	AMLS-5050T-59	Brass Cup
60	AMLS-5050T-60	Overflow Hose

AURIMATE

ASRIMATE

AGRIFATE

AGRIMATE

#### **SPARE PART LIST OF AMLS 5050T POWER SPRAYER**

AGRIMATE

ASBIRATE

SL NO.	PART NO	PARTS NAME
61	AMLS-5050T-61	O-Ring
62	AMLS-5050T-62	Suction Joint
63	AMLS-5050T-63	O-Ring
64	AMLS-5050T-64	Core Coupling
65	AMLS-5050T-65	Wing Net
66	AMLS-5050T-66	Brass Cup
67	AMLS-5050T-67	Suction Hose
68	AMLS-5050T-68	Core Strainer
69	AMLS-5050T-69	Strainer Assy
70	AMLS-5050T-70	Semicircular ring
71	AMLS-5050T-71	Valve Seat
72	AMLS-5050T-72	Stopper
73	AMLS-5050T-73	Valve Spring
74	AMLS-5050T-74	Spring Box
75	AMLS-5050T-75	Under Metal
76	AMLS-5050T-76	Spring
77	AMLS-5050T-77	Spring Box
78	AMLS-5050T-78	Lever
79	AMLS-5050T-79	Fly Nut
80	AMLS-5050T-80	Adjusting Screw
81	AMLS-5050T-81	Pin
82	AMLS-5050T-82	Fastener
83	AMLS-5050T-83	Key
84	AMLS-5050T-84	Suction Hose Assy
85	AMLS-5050T-85	Overflow Hose Assy
86	AMLS-5050T-86	Adjusting Screw Assy
87	AMLS-5050T-87	Body Overflow Assy
88	AMLS-5050T-88	Adjusting Assy
89	AMLS-5050T-89	Adjusting Assy

AURIMATE

ASRIMATE

AGRIPATE

AGRITATE

## **INSPECTION & MAINTENANCE**

For safety use, make sure the machine is cleaned every three-months. Before working, make sure to inspect the filter and the nozzle, and ensure there is no impurity. After working, make sure there is no water in the pump and the hose.

If the machine needs to be repaired in the guarantee period, please return the machine to the shop. You need to provide the certificate of purchase in order to repair or get the substitute.

Before Packing, the machine should be cleaned, then use closed packaging, packaging should be firm. Store the machine in dry place.

For transportation safety. The machine should comply with ISTA.



Meaning of crossed - out wheeled dustbin:

Do not dispose of electrical machines as unsorted municipal waste, use separate collection facilities.

If electrical machines are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.

When replacing old machines with new ones, the retailer is legally obligated to take back your old machine for disposals at least free of charge.

Warranty Card	CUSTOMER COPY
Date Purchaser's Name & Address	Date of Delivery
	Dealer's Office Seal
Product Name AMLS 5050T POWER SPRAYER	
Product Serial No.	Dealer Sign
	Customer Sign.
Invoice / DN No.	I/We accept the terms and conditions of Warranty a in the Warranty Card.
Warranty Card	DEALER'S COPY
Date Purchaser's Name & Address	Date of Delivery
	Dealer's Office Seal
Product Name	÷ 5
AMLS 5050T POWER SPRAYER	
Product Serial No.	Dealer Sign
Total Positional Pop	Customer Sign.
Invoice / DN No.	I/We accept the terms and conditions of Warranty a in the Warranty Card.
Warranty Card	COMPANY COPY
Date Purchaser's Name & Address	Date of Delivery
·	Dealer's Office Seal
Product Name	
AMLS 5050T POWER SPRAYER Product Serial No.	Dealer Sign
	Customer Sign.
Invoice / DN No.	I/We accept the terms and conditions of Warranty a in the Warranty Card.

1. LIMITED WARRANTY PERIOD: For a period of six months from the date of Sale / delivery of the product which ever is earlier. 2. LIMITED WARRANTY OBLIGATION: Replacement of defective part(s) by authorized dealer are free of charges. If found defective by reasons of defective material / poor workmanship, parts will be replaced and there will be no value re-imbursement. 3. TERMS & CONDITIONS: a. Claims under warranty will be accepted on submission of Warranty Card duly filled and stamped by authorized dealer together with the original purchased document.: b. Shipping / transportation / Incidental charges incurred in replacing defective parts under warranty shall be borne by the purchaser.

#### WARRANTY null & void if

- (ii) Lack of maintenance, (ii) Incorrect use of the machine or tampering, (iii) Use of non-genuine spare parts, (iv) Usage of acids, solvents, or any flammable materials, (v) Non-usage of filter water / clear water / soft water & using water above 40°C temperature, (vi) While using the pressure washers to draw water which is contaminated with dust & solvents (eg. paint thinners, gasoline, oil, etc.), (vii) Repair done by unauthorized service people, (viii) Those parts subject to wear & tear due to normal operations and plastic parts, rubber items etc., (ix) Loose connections, faulty electrical fixtures & fluctuations in power supply.
- 4. Should any failure occur during or after the warranty period, customer does not have the right to interrupt payment / price discount.
- 5. Incidental or consequential damages like inconvenience commercial loss, loss of tie, mental agony etc.
- 6. Loss of any nature due to operation or non-operation is not covered under warranty.
- 7. All free service are at Dealer's service point only.
- 8. Warranty ceases if service is not done periodically.
- 9. The attached card should be completed and returned to Ratnagiri Impex Pvt. Ltd. for registration immediately after sale / delivery.
- 10. The warranty is void unless you register the warranty card with Ratnagiri Impex Pvt. Ltd.
- 11. The decision of Ratnagiri Impex Pvt. Ltd., in settling the warranty is final in all respects.
- 12. All disputes are subject to Bangalore Courts Jurisdiction
- 1. LIMITED WARRANTY PERIOD: For a period of six months from the date of Sale / delivery of the product which ever is earlier. 2. LIMITED WARRANTY OBLIGATION: Replacement of defective part(s) by authorized dealer are free of charges. If found defective by reasons of defective material / poor workmanship, parts will be replaced and there will be no value re-imbursement. 3. TERMS & CONDITIONS: a. Claims under warranty will be accepted on submission of Warranty Card duly filled and stamped by authorized dealer together with the original purchase document.: b. Shipping / transportation / Incidental charges incurred in replacing defective parts under warranty shall be borne by the purchaser.

#### WARRANTY null & void if

- (ii) Lack of maintenance, (ii) Incorrect use of the machine or tampering, (iii) Use of non-genuine spare parts, (iv) Usage of acids, solvents, or any flammable materials, (v) Non-usage of filter water / clear water / soft water & using water above 40°C temperature, (vi) While using the pressure washers to draw water which is contaminated with dust & solvents (eg. paint thinners, gasoline, oil, etc.), (viii) Repair done by unauthorized service people, (viii) Those parts subject to wear & tear due to normal operations and plastic parts, rubber items etc, (ix) Loose connections, faulty electrical fixtures & fluctuations in power supply.
- 4. Should any failure occur during or after the warranty period, customer does not have the right to interrupt payment / price discount.
- 5. Incidental or consequential damages like inconvenience commercial loss, loss of tie, mental agony etc.
- 6. Loss of any nature due to operation or non-operation is not covered under warranty.
- 7. All free service are at Dealer's service point only.
- 8. Warranty ceases if service is not done periodically.
- 9. The attached card should be completed and returned to Ratnagiri Impex Pvt. Ltd. for registration immediately after sale / delivery.
- 10. The warranty is void unless you register the warranty card with Ratnagiri Impex Pvt. Ltd.
- 11. The decision of Ratnagiri Impex Pvt. Ltd., in settling the warranty is final in all respects.
- 12. All disputes are subject to Bangalore Courts Jurisdiction
- 1. LIMITED WARRANTY PERIOD: For a period of six months from the date of Sale / delivery of the product which ever is earlier. 2. LIMITED WARRANTY OBLIGATION: Replacement of defective part(s) by authorized dealer are free of charges. If found defective by reasons of defective material / poor workmanship, parts will be replaced and there will be no value re-imbursement. 3. TERMS & CONDITIONS: a. Claims under warranty will be accepted on submission of Warranty Card duly filled and stamped by authorized dealer together with the original purchase document.: b. Shipping / transportation / Incidental charges incurred in replacing defective parts under warranty shall be borne by the purchaser.


#### WARRANTY null & void if

- (i) Lack of maintenance, (ii) Incorrect use of the machine or tampering, (iii) Use of non-genuine spare parts, (iv) Usage of acids, solvents, or any flammable materials, (v) Non-usage of filter water / clear water / soft water & using water above 40°C temperature, (vi) While using the pressure washers to draw water which is contaminated with dust & solvents (eg. paint thinners, gasoline, oil, etc.), (vii) Repair clone by unauthorized service people, (viii) Those parts subject to wear & tear due to normal operations and plastic parts, rubber items etc., (ix) Loose connections, faulty electrical fixtures & fluctuations in power supply.
- 4. Should any failure occur during or after the warranty period, customer does not have the right to interrupt payment / price discount.
- 5. Incidental or consequential damages like inconvenience commercial loss, loss of tie, mental agony etc.
- 6. Loss of any nature due to operation or non-operation is not covered under warranty.
- 7. All free service are at Dealer's service point only.
- 8. Warranty ceases if service is not done periodically.
- 9. The attached card should be completed and returned to Ratnagiri Impex Pvt. Ltd. for registration immediately after sale / delivery.
- 10. The warranty is void unless you register the warranty card with Ratnagiri Impex Pvt. Ltd.
- 11. The decision of Ratnagiri Impex Pvt. Ltd., in settling the warranty is final in all respects.
- 12. All disputes are subject to Bangalore Courts Jurisdiction

AGR	aratnagırı 1st Fr	ee Service Coupon ISO 9001 CERTIFIED COM	2015 PANY
Maximum Pov	FREE SERVICE COUPON	(30 Days / 20 hrs (Which ever is earlier)	
4	Model	Serial Number	Z
AGR	AMLS 5050T POWER SPRAYER		PO
Maximum Pov	PDI Date Service No.	Purchase bill no. Date	WARRANTY AND FREE SERVICE COUPON
4	Dealer's Office Seal		3WE
AGTI Wasimum Pov		Operations:  • Check and Test the Fuel Mixture.	S
Man		Check and Clean the Air Filter Check, Clean and Adjust the Spark plug	ä
4		Check and Adjust the Carburetor Tuning	9
AGR		Check and Sharpen the cutting Tools     Start and Check the Noise, Vibration, Loosen / Fasteners etc.	A
Maximum	Dealer Signature	Product familiarization on Usage     Routine maintenance and Storage	E
Value 1	Customer Signature		HA A
AGR		 my entire satisfaction without any labour charges. Only consumables were chargeo	NA N
Maximum Pov		erticulture   sericulture   nlantations   farestru   agrden   health care	
	AGRIMATE agriculture I ho Mudrum Power-Super Connery	nticulture i sericulture i piantations i forestry i garden i neaturicare	
AGR	### .		
Maximum Pov	2nd l	Free Service Coupon	2015
	16 YO NO YOU THE FUTURE A CW	CERTIFIED COM	
455		DN 60 Days/100 hrs (Which ever is earlier)	
Maximum Pov	Model  AMLS 5050T POWER SPRAYER	Serial Number	No
		Buyebasa hill na Deta	a di
	PDI Date Service No.	Purchase bill no. Date	00
Maximum Pov	Dealer's Office Seal		WARRANTY AND FREE SERVICE COUPON
	Dealer's Office Sear	Operations:  • Check and Test the Fuel Mixture.	# #
		Check and Clean the Air Filter	Щ
Maximum Pov		<ul> <li>Check, Clean and Adjust the Spark plug</li> <li>Check and Adjust the Carburetor Tuning</li> </ul>	#
		Check and Sharpen the cutting Tools     Start and Check the Noise, Vibration, Loosen / Fasteners etc.	A
4	Dealer Signature		Ţ
AGIT	Contained Circuit	- Houtile maintenance and Storage	RAI
Maximum	Customer Signature		. AB
\d		my entire satisfaction without any labour charges. Only consumables were charged	>
AGR	AGRIFIATE agriculture I ho	orticulture   sericulture   plantations   forestry   garden   health care	
Maximum	Out f		
4	ratnagırı 3rd i	Free Service Coupon ISO 9001-	
AGR	18 45 NG YOU THE FUTURE NOW	ON 90 Days/200 hrs (Which ever is earlier)	PANY
Maximum Pot	Model	Serial Number	
4	AMLS 5050T POWER SPRAYER		NO.
AGR	PDI Date Service No.	Purchase bill no. Date	COUPO
Maximum Pov			
	Dealer's Office Seal		
455		Operations:  • Check and Test the Fuel Mixture.	S
Maximum Pov		Check and Clean the Air Filter     Check, Clean and Adjust the Spark plug	WARRANTY AND FREE SERVICE
	A 100	<ul> <li>Check and Adjust the Carburetor Tuning</li> </ul>	<u> </u>
		Check and Sharpen the cutting Tools     Start and Check the Noise, Vibration, Loosen / Fasteners etc.	AN
Maximum Pov	Dealer Signature	• Product familiarization on Usage • Routine maintenance and Storage	È
	Customer Signature		RA
4		 my entire satisfaction without any labour charges. Only consumables were charged	, AB
AGIT	40	my orano sansiantium withrout any rappui charges, Only consumanies welle charged	>
Maximum	AGRIPATE agriculture I ho	inticulture i sericulture i piantations i foresti y i garden i nearth care	

AGRI

AGRI

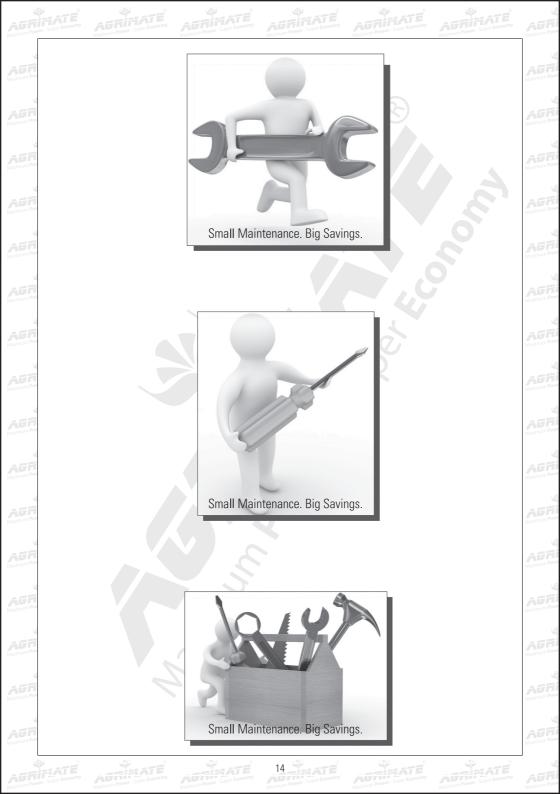

 Always read the instruction manual supplied along with the equipments and understand the correct installation and operating procedures before attempting to use the equipments.

It is important to use the personal protection equipments such as head helmet with visor, ear defenders, goggles,

Always keep the equipments in good working condition to minimize loss of output as well as to reduce the pollution

safety gloves, cut resistant shoes, trousers and jackets while operating potentially dangerous machines.

Avoid untrained persons using the equipments. Children must not be allowed to handle these equipments.

- Always use genuine spares and accessories in repairs and usage to derive maximum life of the equipments.

and save the environment.

Do not use the machine within range of persons unless they wear protective clothing.

- Do not operate the machine when fatigued or under the influence of alcohol or drugs.
- When the machine is running, please maintain a constant water supply. Without water circulation will damage the sealing rings of the machine.
- For more query kindly contact for our Service Center/Dealer/ franchise

## **Agrimate Army For Pest Control**

ANY WHERE - ANY TIME - ANY CROP



IMPORTED AND MARKETED BY:
RATNAGIRI IMPEX PVT., LTD.,
Annapurna House, #1/1G, 7th Cross, New Guddadahalli
Mysore Road, Bangalore - 560 026

Customer Care: 1800-425-3036
Email: marketing@ratnagiriimpex.com



